




# Heyco® RDD Pigtail Lockit™ Strain Relief Bushings

## For Round Cables

WILL FIT THESE CABLES				CHASSIS DIMENSIONS				PART NO.	DESCRIPTION
UL Type Designation	AWG Conductors	Approximate Size		Mounting Hole Size		Thickness			
		in.	mm.	in.	mm.	in.	mm.		
SV	18/3	.220	5,6	.625 w/ .550 flats	15,9 w/ 14,0 flats	.032	0,8	1773	RDD 101-7
SVT	18/3	.290	7,4			.040	1,1		
						.048	1,2		
						.063	1,6		
						.099	2,5		

Standard color black. Consult Heyco for white and other colors.

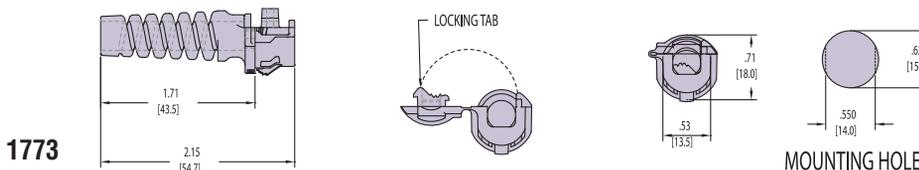


- Protects the lifeline of your electric/electronic products by absorbing forces of pull, push, twist, and flex.
- Securely anchors, insulates, and protects cables at panel entry points.
- Integral nylon spring eases the cable into a lazy bend; prevents sharp bending and assures longest cable and product life.
- Adds reliability, longevity, and safety.
- Assembly friendly! Independent of insertion into the panel, RDD Pigtail Strain Reliefs self-lock onto the cable. Thus, they may be preassembled offline for final assembly at a later time or remote location, for lower installed cost.

## For Flat Cables

WILL FIT THESE CABLES				CHASSIS DIMENSIONS				PART NO.	DESCRIPTION
UL Type Designation	AWG Conductors	Approximate Size		Mounting Hole Size		Thickness			
		in.	mm.	in.	mm.	in.	mm.		
SPT-1	18/2 18/3	.12 x .22 .12 x .32	3,0 x 5,6 3,0 x 8,1	.625 w/ .550 flats	15,9 w/ 14,0 flats	.032	0,8	1769	RDD 100A-7
						.040	1,1		
						.048	1,2		
						.063	1,6		
				.099	2,5				
SPT-2	18/2	.12 x .32	3,0 x 8,1	.625 w/ .550 flats	15,9 w/ 14,0 flats	.032	0,8	1771	RDD 100-7
HPN	16/2	.16 x .32	4,1 x 8,1	.625 w/ .550 flats	15,9 w/ 14,0 flats	.040	1,1		
				.048	1,2	.063	1,6		
				.099	2,5				

Standard color black. Consult Heyco for white and other colors.

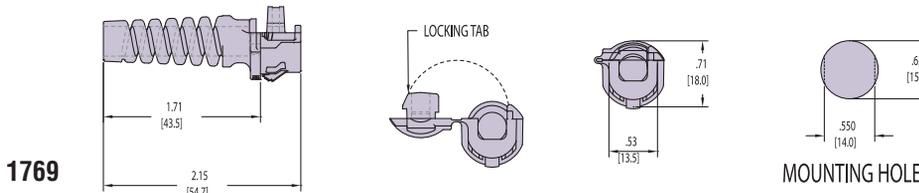

- Automated application equipment speeds assembly and lowers costs while reducing or eliminating repetitive manual assembly motions.
- See page 3-1 for Heyco's Automated Pre-Assembly Equipment.
- Installs easily with fingertip pressure into a standard round or Double "D" hole. No clumsy hand tools required.
- Multiple panel locking steps secure RDD Pigtail into a range of panel thicknesses.
- Designed to pass CSA's 50,000 cycle "vacuum cleaner" test ( C22.2 No. 67) and UL's 859 specification for Household Electric Personal Grooming Appliances "Cord Flexing Test".

**Material** 6/6 Nylon

**Certifications** Recognized under the Component Program of Underwriters' Laboratories File E15331 (far exceeds UL's 35# pull-out test).

Certified by the Canadian Standards Association File LR8919

**Flammability Rating** 94V-2

**Material Temperature Index** 257° (125°C)—Maximum temperature on part not to exceed 221°F (105°C)

Quick Specs