


Heyco® Lockit™ Strain Relief Bushings


For Flat Cables-Rectangular Mounting Hole




WILL FIT THESE CABLES				PANEL DIMENSIONS				PART NO.	DESCRIPTION
UL Type	AWG/ Conductors	Approximate Size		Mounting Hole Size		Thickness		Black	
Designation		in.	mm.	in.	mm.	in.	mm.		
SPT-1	18/2 18/3	.12 x .22 .12 x .30	3,0 x 5,6 3,0 x 7,6	.453 x .512	11,5 x 13,0	.040	1,0	1829	ST-100N
SPT-2 & HPN	18/2 16/2	.15 x .28 .16 x .30	3,8 x 7,1 4,1 x 7,6			.063	1,6		
HPN	16/3 18/3	.16 x .37 .15 x .40	4,1 x 9,4 3,8 x 10,2	689 x .689	17,5 x 17,5			1834	ST-200N
SPT-2	16/3 18/2	.16 x .41 .19 x .35	4,1 x 10,4 4,8 x 8.9				1		
SPT-3	18/3 16/2 16/3 14/2					.126 .157	3,2 4,0		
SPT-3 HPN SPT2	16/3 18/3 18/2	.380 x .105	9,65 x 2,69	.453 x .630	11,5 x 16,0	.040 .048 .063	1,0 1,2 1,6	1847	ST-100L
	SPT-2 SPT-2 SPT-2 SPT-3 HPN	Designation 18/2 18/3 SPT-1 18/2 18/3 SPT-2 & HPN 16/2 16/2 HPN 16/3 18/3 SPT-2 18/2 16/3 18/2 SPT-3 16/3 16/3 14/2 SPT-3 16/3 14/2	Designation in. SPT-1 18/2 .12 x .22 18/3 .12 x .30 SPT-2 18/2 .15 x .28 8 HPN 16/2 .16 x .30 HPN 18/3 .15 x .40 SPT-2 16/3 .16 x .41 18/2 .19 x .35 SPT-3 16/2 .20 x .37 16/3 .20 x .43 14/2 .24 x .42 SPT-3 16/3 .032 x .099 HPN 18/3 .380 x .105	Designation in. mm. SPT-1 18/2 .12 x .22 3,0 x 5,6 18/3 .12 x .30 3,0 x 7,6 SPT-2 18/2 .15 x .28 3,8 x 7,1 HPN 16/2 .16 x .30 4,1 x 7,6 HPN 18/3 .15 x .40 3,8 x 10,2 SPT-2 16/3 .16 x .41 4,1 x 10,4 18/2 .19 x .35 4,8 x 8.9 SPT-3 16/2 .20 x .37 5,1 x 9,4 16/3 .20 x .43 5,1 x 10,9 14/2 .24 x .42 6,1 x 10,7 SPT-3 16/3 .032 x .099 0,8 x 2,5 HPN 18/3 .380 x .105 9,65 x 2,69	Designation in. mm. in. SPT-1 18/2 18/2 12 x .22 3,0 x 5,6 18/3 .12 x .30 3,0 x 7,6 3,0 x 7,6 453 x .512 SPT-2 HPN 16/2 1.6 x .30 16/2 1.6 x .30 4,1 x 7,6 .16 x .37 4,1 x 9,4 3,8 x 10,2 3,9 x .35 3,1 x 10,4 3,8 x 8.9 .689 x .689 SPT-2 18/2 19/2 18/2 19/2 20 x .37 5,1 x 9,4 16/3 20 x .43 5,1 x 10,9 14/2 24 x .42 6,1 x 10,7 .689 x .689 SPT-3 16/3 .032 x .099 0,8 x 2,5 HPN 18/3 .380 x .105 9,65 x 2,69 .453 x .630 .453 x .630	Designation in. mm. in. mm. SPT-1 18/2 18/2 12 x .22 3,0 x 5,6 18/3 .12 x .30 3,0 x 7,6 3,0 x 7,6 453 x .512 11,5 x 13,0 SPT-2 HPN 16/2 1.6 x .30 1.6 x .30 1.6 x .30 1.6 x .30 1.5 x .40 3,8 x 10,2 4,1 x 7,6 4,1 x 9,4 1,1 x 10,4 1,	Designation in. mm. in. mm. in. SPT-1 18/2 18/2 12 x .22 3,0 x 5,6 18/3 .12 x .30 3,0 x 7,6 .032 .040 SPT-2 4 HPN 16/2 1.16 x .30 1.16 x .30 4,1 x 7,6 18/3 1.15 x .40 3,8 x 10,2 18/2 1.19 x .35 4,8 x 8.9 .453 x .512 11,5 x 13,0 0.048 .063 .099 SPT-2 18/3 1.16 x .41 4,1 x 10,4 18/2 1.19 x .35 4,8 x 8.9 .689 x .689 17,5 x 17,5 0.032 .063 .063 SPT-3 16/3 2.20 x .43 5,1 x 10,9 14/2 2.24 x .42 6,1 x 10,7 14/2 2.24 x .42 6,1 x 10,7 0.032 .032 .040 .040 .053 .032 x .099 0,8 x 2,5 0.040 .048 .063 .453 x .630 11,5 x 16,0 0.048 .063 .0032 x .099 0,8 x 2,5 0.040 .048 .063 SPT-3 18/3 18/3 380 x .105 9,65 x .269 SPT2 18/2 135 x .270 3,34 x 6,86 .453 x .630 11,5 x 16,0 0.048 .063	Designation in. mm. in. mm. in. mm. in. mm. SPT-1 18/2 .12 x .22 3,0 x 5,6 .032 0,8 .040 1,0 SPT-2 18/2 .15 x .28 3,8 x 7,1 .453 x .512 11,5 x 13,0 .048 1,2 .063 1,6 .099 2,5 HPN 16/3 .16 x .37 4,1 x .9,4 .41 x .10,4 .032 .08 .063 1,6 .099 2,5 SPT-2 16/3 .16 x .41 4,1 x .10,4 .032 .08 .063 1,6 SPT-3 16/2 .20 x .37 5,1 x .9,4 .689 x .689 17,5 x .17,5 .099 2,5 SPT-3 16/3 .20 x .43 5,1 x .10,9 .126 3,2 .157 4,0 SPT-3 16/3 .032 x .099 0,8 x .2,5 .453 x .630 11,5 x 16,0 .048 1,0 HPN 18/3 .380 x .105 9,65 x .2,69 .453 x .630 11,5 x 16,0 .048 <td>Designation in. mm. in. <th< td=""></th<></td>	Designation in. mm. in. <th< td=""></th<>

Standard color black. Consult Heyco for white and other colors.

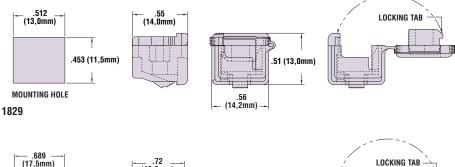

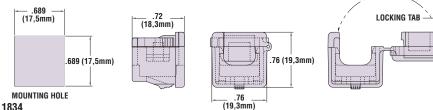

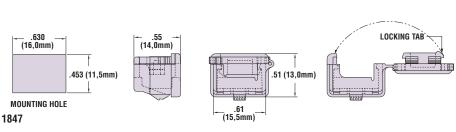

- Assembly friendly! Independent of insertion into the panel, Lockit Strain Reliefs self-lock onto the cable. Thus, they may be pre-assembled offline for final assembly at a later time or remote location, for lower installed cost!
- Lockit Strain Reliefs hold so well they pass the UL pullout test requirements with or without panel support.
- They protect the lifeline of your electric/electronic products by absorbing the forces of push and pull that may be exerted on the flexible power cord. And, their rectangular design eliminates the possibility of part rotation under forces of twist.
- Lockit's three finger design securely anchors into panels as thin as .032" (0,8 mm) and as thick as .157" (4,0 mm) for a neat, clean appearance. Five locking steps accommodate a wide range of panel thickness. Low profile head satisfies design aesthetics!
- Standardize panel design! Fill unused Lockit Strain Relief mounting holes with the Heyco Rectangular Plug RP 115-130 (See page 3-23).
- See page 3-1 for Heyco's Automated Pre-Assembly Equipment.