



Heyco® Bell-Mouth Strain Relief Bushings

For Flat Cables

WILL FIT THESE CABLES				PANEL DIMENSIONS						PART NO.	DESCRIPTION	PART DIMENSIONS			
UL Type Designation	AWG/ Conductors	Approximate Size		A Mounting Hole Dia.		B To Prevent Rotation		Maximum Panel Thickness				Black	C Head Length	B Body Length	
		in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.			in.	mm.
CLOCK	20/2	.09x.18	2,3x4,6	.375	9,5	.330	8,4	.062	1,6	1020	SR 2P-5	.375	9,5	.625	15,9
SPT2	18/2	.11x.21	2,8x5,3												
SPT-1	18/2	.12x.22	3,0x5,6	.437	11,1	.390	9,9	.062	1,6	1080	SR 3P-5	.375	9,5	.625	15,9
SPT-1	18/3	.12x.30	3,0x7,6	.500	12,7										
SPT-2 & HPN	18/2	.15x.28	3,8x7,1	.500	12,7	.465	11,8	.062	1,6	1108	SR 4N-5	.406	10,3	.703	17,9
	16/2	.16x.30	4,1x7,6	.500	12,7										
HPN	18/3	.15x.34	3,8x8,6	.625	15,9	.550	14,0	.125	3,2	1229	SR 6K-5	.421	10,7	.813	20,7
	16/3	.16x.37	4,1x9,4												
SPT-2	16/2	.16x.30	4,1x7,6												
	16/3	.16x.41	4,1x10,4												

Standard color black. Consult Heyco for white and other colors.
 *Maximum Panel Thickness-Part has additional clearance.




- Protects the lifeline of your electric/electronic products by absorbing forces of pull, push, twist, and flex.
- Securely anchors, insulates, and protects cable at panel entry points.
- Flared "trumpet" exit eases the cable into a lazy bend, prevents sharp bending, and assures longer cable and product life.
- See pages 3-24, 3-25, and 3-26 for SR hole punches and assembly tools.

For Round Cables

WILL FIT THESE CABLES				PANEL DIMENSIONS						PART NO.	DESCRIPTION	PART DIMENSIONS															
UL Type Designation	AWG/ Conductors	Approximate Diameter		A Mounting Hole Dia.		B To Prevent Rotation		Maximum ¹ Panel Thickness				Black	C Head Length	B Body Length													
		in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.			in.	mm.												
SV & SVT	18/2	.250	6,3	.500	12,7					1143	SR 5N-5	.406	10,3	.688	17,5												
	18/3	.255	6,5	.500-.515	12,7-13,1																						
HPD	18/2	.270	6,9	.500	12,7	.450	11,4	.062	1,6	1143	SR 5N-5	.406	10,3	.688	17,5												
	16/2	.290	7,4	.500-.515	12,7-13,1																						
SJ, SJO & SJT	18/2	.300	7,6	.625	15,9	.550	14,0	.125	3,2	1226	SR 6P-5	.421	10,7	.813	20,7												
	16/2	.315	8,0	.625	15,9											1232	SR 6P2-5	.421	10,7	.813	20,7						
	18/3	.320	8,1																								
SJ, SJO & SJT	16/2	.325	8,2	.625	15,9	.550	14,0	.062	1,6	1223	SR 6N3-5	.421	10,7	.813	20,7												
	18/3	.330	8,4																								
	14/2	.350	8,9																								
	16/3	.355	9,0																								
	18/4	.360	9,1																								
Same as SR 6N3-5 above except									.125	3,2	1220	SR 6P3-5	.421	10,7	.813	20,7											

Standard color black. Consult Heyco for white and other colors.
 *Maximum Panel Thickness-Part has additional clearance.

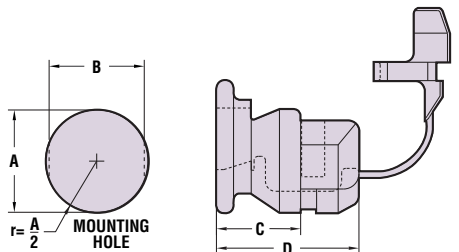

Material 6/6 Nylon

Certifications Recognized under the Component Program of Underwriters' Laboratories File E15331

Certified by the Canadian Standards Association File LR8919

Flammability Rating 94V-2

Material Temperature Index 257°F (125°C)-Maximum temperature on part not to exceed 221°F (105°C)

Quick Specs